



MANUFACTURING, INC.

ALUMINUM COUNTER DOORS
Model S



LIGHT AND BRIGHT DESIGN

R&S Aluminum Counter Doors offer compact design and attractive appearance. Anodized extruded aluminum components combine a light weight, smooth, bright finish and excellent corrosion resistance for a variety of applications.

R&S Counter Doors can be modified in construction to provide anodized aluminum service doors up to 12 feet wide, 10 feet high and a maximum of 100 square feet.

AVAILABLE FINISHES

Standard



Slats, Footpiece,
Guides & Hood
Clear Anodized



Brackets
Grey Primer


Optional




Brackets, Slats, Footpiece,
Guides & Hood
*Dark Bronze
Anodized Aluminum*

CONSTRUCTION


Extruded Aluminum Tubular Bottom Bar





#15 Slat



Face Mount



Between-Jamb Mount

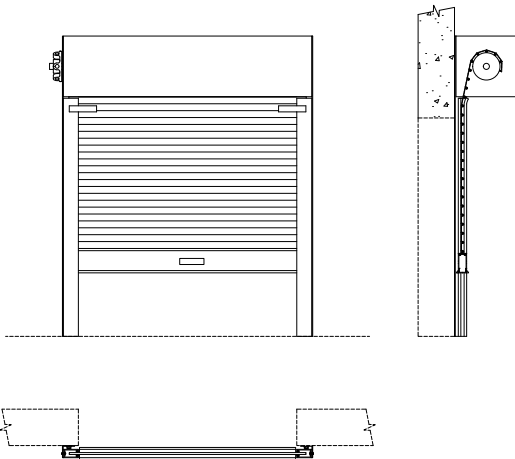

R&S Manufacturing of Northern CA

800-221-3667 | 510-429-1788

R&S Manufacturing of Southern CA

800-350-3667 | 909-596-2090

R&S Manufacturing Oregon

800-359-4197 | 503-777-6370

www.rsdoorproducts.com

SPECIFICATIONS

Warranty

2 year/ 20,000 cycles

Mounting

Face of wall or between-jamb

Operation

- Standard: Push-pull
- Optional: Chain hoist, Motor prep

Curtain

6063 extruded alloy aluminum type 15 slats, coil, riveted endlocks. Bottom of curtain reinforced by extruded aluminum tubular footpiece with astragal.

Guides

Extruded aluminum guides bolted to aluminum wall angles and fitted with nylon pile wear strips.

Brackets

Steel plates

Barrel

Steel pipe

Hood

Aluminum sheet

Locking

Slidebolt locks

OPTIONS

Key or Thumbturn Cylinder Lock

Installed on footpiece or guide.

Tubular Motor Operator

For counter doors in limited usage applications.

Available in 115 volt/single phase with constant contact one button or key switch control. Can also be provided with a low voltage controller when options such as a 3 button station, reversing edge or timer are required.